

CONTROLS WIRING DIAGRAM (WD12)

DESCRIPTION:

- SINGLE CIRCUIT, TWO RELAY LIGHTING CONTROL, PARTIAL AUTO ON, PARTIAL AUTO OFF
- NO RECEPTACLE CONTROL
- CEILING OCCUPANCY SENSOR(S), LOW-VOLTAGE SWITCH(ES)

NOTES:

1. PROVIDE ONE ROOM CONTROLLER FOR THE SET OF LUMINAIRES IN THE ROOM DESIGNED TO BE CONTROLLED SEPARATELY, OR FOR EACH CIRCUIT TO BE CONTROLLED. PROVIDE OCCUPANCY SENSORS AS INDICATED ON PLANS. PROVIDE ONE OR MORE LOW-VOLTAGE SWITCHES FOR EACH SPACE TO BE CONTROLLED. SEE PROGRAMMING NOTES.
2. PROGRAM BUTTON TO OPERATE 'b' LOADS "ON" AND "OFF".
3. PROGRAM BUTTON TO OPERATE 'c' LOADS "ON" AND "OFF".
4. PROGRAM BUTTON TO OPERATE 'd' LOADS "ON" AND "OFF".
5. PROGRAM LOAD CONTROL BUTTON TO TURN ON ALL LIGHTS CONTROLLED BY THIS CONTROLLER AT 50% PRESET LEVEL. TAP THE TOP BUTTON TO TURN ON THE LIGHTS AND TAP THE BOTTOM BUTTON TO TURN OFF THE LIGHTS. PRESS AND HOLD THE TOP BUTTON TO RAISE THE LIGHTING LEVEL. PRESS AND HOLD THE BOTTOM BUTTON TO LOWER THE LIGHTING LEVEL. IT IS THE INTENT OF THIS WIRING DIAGRAM TO REPRESENT SITUATIONS INVOLVING LUMINAIRES WITH MULTIPLE LIGHT LEVELS (STEP-DIMMING AND FULL DIMMING), AS WELL AS LUMINAIRES IN THE SAME ROOM WHICH ARE CONTROLLED INDEPENDENTLY OF EACH OTHER.
- 6.

SEQUENCE OF OPERATION:

1. LIGHTING LOAD 'a' IS ALWAYS "ON". REMAINING SYSTEM (LIGHTING LOAD 'b') TURNS "ON" WHEN LOW-VOLTAGE SWITCH IS OPERATED, OR AUTOMATICALLY TURNS "ON" WHEN SENSOR DETECTS OCCUPANCY. LIGHTING LOAD 'c' AND LIGHTING LOAD 'd' TURNS "ON" WHEN LOW VOLTAGE SWITCH IS OPERATED.
2. LIGHTING LOAD 'b' TURNS "OFF" WHEN LOW-VOLTAGE SWITCH IS OPERATED, OR WHEN OCCUPANCY SENSORS NO LONGER DETECT THAT THE ROOM IS OCCUPIED AND THE PROGRAMMED TIME DELAY HAS ELAPSED. LIGHTING LOAD 'c' AND LIGHTING LOAD 'd' TURNS OFF WHEN LOW VOLTAGE SWITCH IS OPERATED
3. ENTIRE SYSTEM TURNS "OFF" WHEN THE BUILDING IS UNOCCUPIED, OR WHEN THE PROGRAMMED TIME DELAY HAS ELAPSED.

GENERAL NOTES: (APPLICABLE TO ENTIRE SHEET)

- ① VERIFY WIRING REQUIREMENTS WITH MANUFACTURER. WIRING MAY DIFFER BETWEEN MANUFACTURERS.
- ② FOR QUANTITY OF SENSORS AND SWITCHES, REFER TO LIGHTING PLANS.
- ③ AUTOMATIC LIGHTING CONTROL SYSTEM MUST COMPLY WITH NFPA 101, 7.8.1, TO INCLUDE BUT NOT LIMITED TO THE FOLLOWING:
 1. THE AUTOMATIC LIGHTING CONTROL DEVICE MUST BE LISTED.
 2. THE AUTOMATIC LIGHTING CONTROL MUST BE EQUIPPED TO AUTOMATICALLY ENERGIZE THE CONTROLLED LIGHTS UPON LOSS OF NORMAL POWER. SEE FIRE PROTECTION DRAWINGS FOR REQUIREMENTS.
 3. THE AUTOMATIC LIGHTING CONTROL DEVICE IS ACTIVATED BY OCCUPANT MOVEMENT IN THE AREA SERVED.
 4. THE AUTOMATIC LIGHTING CONTROL DEVICE IS ACTIVATED BY ACTIVATION OF THE BUILDING FIRE ALARM SYSTEM.
 5. THE AUTOMATIC LIGHTING CONTROL DEVICE DOES NOT CAUSE THE DE-ENERGIZING OF EMERGENCY BATTERIES.
 6. PROVIDE ALL CONDUIT, WIRING DEVICES, AND CONNECTIONS REQUIRED.
- ④ SUBMIT SHOP DRAWING OF ENTIRE SYSTEM, TO INCLUDE BUT NOT LIMITED TO PRODUCT DATA AND WIRING/CONTROL DIAGRAMS FOR REVIEW AND APPROVAL.
- ⑤ INSTALL ALL CABLES IN CONDUIT. MINIMUM CONDUIT SIZE AS PER SPECIFICATION 16402.


IF SHEET IS LESS THAN 24" X 36"
REDUCED PRINT - USE GRAPHIC SCALES

REVISIONS		
No.	Description	Date

TRMA
Taniguchi Ruth Makio Architects
100 Cliff Business Center, P.O. Box EA, Agaña, GU 96910
Tel.: (671) 475-8772 • Fax.: (671) 472-3381

Architecture
Planning
Interior Design

EMCE
EMCE • Consulting engineers
SUITE 201, 133 ANTONIA COURT
P.O. BOX 8888 TAMUNING, GUAM 96931
671 - 649-0166/7 Phone
671 - 646-EMCE (3623) Fax

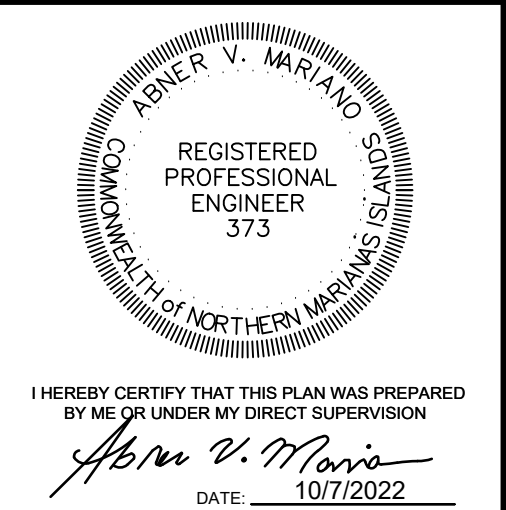

Project:

NMC
PACKAGE 1: STUDENT
CENTER BUILDING

Title:

MISCELLANEOUS
DIAGRAMS - SHEET 18

CONSTRUCTION
DOCUMENTS

Designed: JF/LB
Drawn: NP/RS
Checked: IA/AM
Supv: AM
Scale: AS INDICATED
Date: 10/07/2022
Project No. File

Drawing No.
E2.22
Sheet No. _____ of _____