


AV CREDENZA FOR AV INFRASTRUCTURE  
REQUIREMENTS, SEE 1  
T6.7  
TO JUNCTION BOX AVS-JB2 (CEILING MICROPHONES)  
TO JUNCTION BOX AVS-JB1 (CEILING SPEAKERS)

- GENERAL NOTES:
- 1 PROVIDE 1" CONDUIT FROM ALL TELECOM DEVICES (VOICE, DATA, AND WAP) TO THE NEAREST CABLE TRAY. HOMERUN CABLES TO ITS DESIGNATED FLOOR TELECOM ROOM. SEE DETAIL 1 T6.3
  - 2 STUB-UP 1" EMPTY CONDUIT WITH PULLSTRINGS FROM ALL CCTV JUNCTION BOX AND SPEAKER JUNCTION BOX TO THE NEAREST CABLE TRAY.
- NOTES: (LIST OF NOTES APPLICABLE TO ALL T4.X.X SERIES DRAWINGS. NOT ALL NOTES MAY BE USED ON EACH INDIVIDUAL T4.X.X DRAWINGS)
- 1 STATEGICALLY LOCATE DEVICE SO THEY ARE INSTALLED BEHIND THE TV MONITOR (HIDDEN FROM VIEW) COORDINATE WITH TV MONITOR INSTALLATION.
  - 2 MOUNT 8" ABOVE COUNTER.
  - 3 PROVIDE ESS REQUIREMENT FOR SINGLE DOOR DETAIL, SEE 1 T6.6
  - 4 PROVIDE ESS REQUIREMENT FOR DOUBLE DOOR DETAIL, SEE 2 T6.6
  - 5 FLOOR MOUNTED JUNCTION BOX STUB-UP TO NEAREST CABLE TRAY FOR FUTURE RFID.
  - 6 MOUNT AT 10'-0" AFF.
  - 7 MOUNT 2" ABOVE COUNTERTOP TO BOTTOM OF TELECOM OUTLET.
  - 8 FOR TELECOMMUNICATION EQUIPMENT ELEVATIONS, SEE 1 T2.4
  - 9 HOMERUN 1" EMPTY CONDUIT WITH PULLSTRINGS FROM ALL AV JUNCTION BOX AND SPEAKER JUNCTION BOX TO MEDIA STORAGE 301b JUNCTION BOX.
  - 10 6-GANG X 2-1/2"D LARGE AV BOX.
  - 11 MOUNT 10'-0" AFF.

1 THIRD FLOOR TELECOMMUNICATIONS PLAN - SHEET 1  
SCALE: 1/4" = 1'-0"

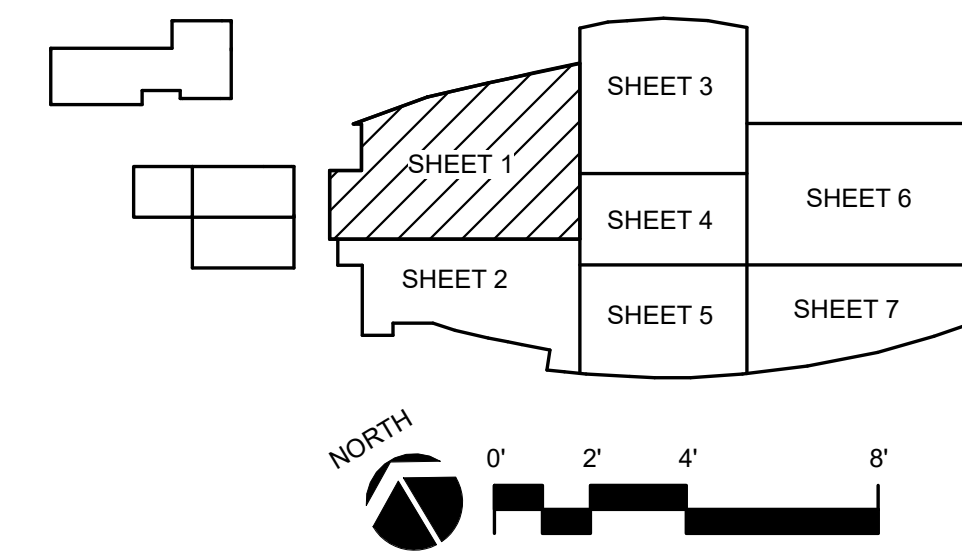

IF SHEET IS LESS THAN 24" X 36"  
REDUCED PRINT - USE GRAPHIC SCALES

REVISIONS		
No.	Description	Date
1	ADDENDUM 1	12/6/22

**TRMA**

**Taniguchi Ruth Makio Architects**  
100 Cliff Business Center, P.O. Box EA, Agaña, GU 96910  
Tel.: (671) 475-8772 • Fax.: (671) 472-3381

Architecture  
Planning  
Interior Design

**eme**

**EMCE - Consulting Engineers**  
SUITE 201, 133 ANTONIA COURT  
P.O. BOX 9940 TAMUNING, GUAM 96931  
671. 649-0166/7 Phone  
671. 646-EMCE (3623) Fax

**Bicsi**  
Abner V. Mariano  
Reg. No. 211020R  
Expires 12/31/24  
RCDD  
I HEREBY CERTIFY THAT THIS PLAN WAS PREPARED BY ME OR UNDER MY DIRECT SUPERVISION  
DATE: 10/7/2022

Project: NMC  
PACKAGE 1: STUDENT CENTER BUILDING

Title: THIRD FLOOR TELECOMMUNICATIONS PLAN - SHEET 1  
CONSTRUCTION DOCUMENTS

Designed: JF/LB  
Drawn: NP/RS  
Checked: IA/AM  
Supv: AM  
Scale: AS INDICATED  
Date: 10/07/2022  
Project No. 24-22-493  
Drawing No. T4.3.1