


1 GROUND FLOOR TELECOMMUNICATIONS PLAN - SHEET 4
SCALE: 1/4" = 1'-0"

- GENERAL NOTES:
- 1 PROVIDE 1" CONDUIT FROM ALL TELECOM DEVICES (VOICE, DATA, AND WAP) TO THE NEAREST CABLE TRAY. HOMERUN CABLES TO ITS DESIGNATED FLOOR TELECOM ROOM. SEE DETAIL 1 T6.3
 - 2 STUB-UP 1" EMPTY CONDUIT WITH PULLSTRINGS FROM ALL CCTV JUNCTION BOX AND SPEAKER JUNCTION BOX TO THE NEAREST CABLE TRAY.
- NOTES: (LIST OF NOTES APPLICABLE TO ALL T4.X.X SERIES DRAWINGS. NOT ALL NOTES MAY BE USED ON EACH INDIVIDUAL T4.X.X DRAWINGS)
- 1 STATEGICALLY LOCATE DEVICE SO THEY ARE INSTALLED BEHIND THE TV MONITOR (HIDDEN FROM VIEW) COORDINATE WITH TV MONITOR INSTALLATION.
 - 2 MOUNT 8" ABOVE COUNTER.
 - 3 PROVIDE ESS REQUIREMENT FOR SINGLE DOOR DETAIL, SEE 1 T6.6
 - 4 PROVIDE ESS REQUIREMENT FOR DOUBLE DOOR DETAIL, SEE 2 T6.6
 - 5 FLOOR MOUNTED JUNCTION BOX STUB-UP TO NEAREST CABLE TRAY FOR FUTURE RFID.
 - 6 MOUNT AT 10'-0" AFF.
 - 7 MOUNT 2" ABOVE COUNTERTOP TO BOTTOM OF TELECOM CLOSET.
 - 8 FOR TELECOMMUNICATION EQUIPMENT ELEVATIONS, SEE 1 T2.4
 - 9 HOMERUN 1" EMPTY CONDUIT WITH PULLSTRINGS FROM ALL AV JUNCTION BOX AND SPEAKER JUNCTION BOX TO MEDIA STORAGE 301b JUNCTION BOX.
 - 10 6-GANG X 2-1/2"D LARGE AV BOX.
 - 11 MOUNT 10'-0" AFF.

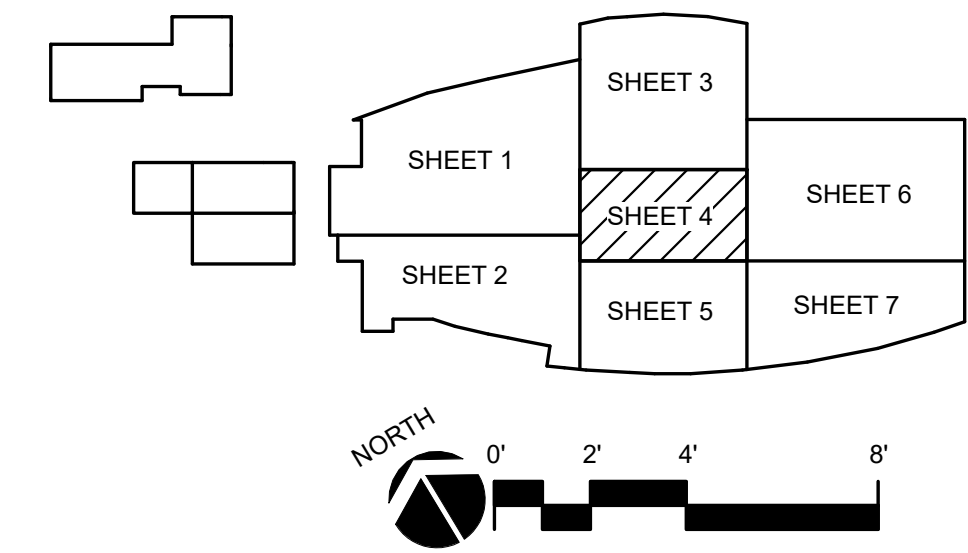

IF SHEET IS LESS THAN 24" X 36"
REDUCED PRINT - USE GRAPHIC SCALES

REVISIONS		
No.	Description	Date
1	ADDENDUM 1	12/6/22

TRMA
Taniguchi Ruth Makio Architects
100 Cliff Business Center, P.O. Box EA, Agaña, GU 96910
Tel.: (671) 475-8772 • Fax: (671) 472-3381

Architecture
Planning
Interior Design

emce
EMCE Consulting Engineers
SUITE 201, 133 ANTONIA COURT
P.O. BOX 9940 TAMUNING, GUAM 96931
671. 649-0166/7 Phone
671. 646-EMCE (3623) Fax

REGISTERED COMMUNICATIONS DISTRIBUTION DESIGNER
Bicsi
Abner V. Mariano
Reg No. 211020R
Expires 12-31-24
RCDD
Abner V. Mariano

ABNER V. MARIANO
REGISTERED PROFESSIONAL ENGINEER
373
ENGINEER OF NORTHERN MARIANA ISLANDS
I HEREBY CERTIFY THAT THIS PLAN WAS PREPARED BY ME OR UNDER MY DIRECT SUPERVISION
Abner V. Mariano
DATE: 10/7/2022

Project: NMC
PACKAGE 1: STUDENT CENTER BUILDING

Title: GROUND FLOOR TELECOMMUNICATIONS PLAN - SHEET 4
CONSTRUCTION DOCUMENTS

Designed: JF/LB
Drawn: NP/RS
Checked: IA/AM
Supv: AM
Scale: AS INDICATED
Date: 10/07/2022
Project No. 24-22-493
File
Drawing No.

T4.1.4
Sheet No. of